



**FOOD &
BEVERAGE**




About SCG Chemicals or SCGC

SCG Chemicals or SCGC is one of the leader in sustainable chemical innovations and manufacturing in Thailand and ASEAN that offers a full range of petrochemical products ranging from upstream production of olefins to downstream production of 3 main plastics resins: polyethylene, polypropylene, and polyvinyl chloride including finished products.

SCGC is committed to conducting business in line with Environmental, Social, and Governance (ESG) and achieving Sustainable Development Goals (SDGs). SCGC is developing new technology and innovation to create high value added products (HVA) and holistic service solutions concerning growing areas such as circular economy, medical & healthcare, and electric vehicle (EV) to better meet diverse places and emphasis demands sustainable environmental stewardship.

OUR PRODUCTION CAPACITY (AS OF 2021)

TOTAL CAPACITY : 3,016 KTA (PE / PP / PVC)




HDPE 980 KTA

LLDPE 140 KTA

LDPE 150 KTA

PP 860 KTA



PVC 850 KTA

PVC Paste 36 KTA

ESG Strategic Directions



“INNOVATION THAT’S REAL”





FOOD & BEVERAGE

SCGC believes in being a part of environmental conservation efforts by creating sustainable packaging.

With population growth on the rise, the issue of waste, especially from food and beverage packaging, has gained attention from both people and companies who wish to take better care of the environment.

SCGC believes in being a part of environmental conservation efforts by creating sustainable packaging. Thus, SCGC has developed its signature SMX™ Technology, an innovative manufacturing process for high-density polyethylene (HDPE) resins that are recyclable, stronger, lighter, and uses less plastic. SCGC has also established i2P Center, an innovation and application development hub where partners can explore novel solutions for HDPE, LDPE, and PP applications that give superior quality and environmentally friendly.

To further reduce environmental impact, SCGC has been working on developing mono-material solutions for fully recyclable packaging. With its longstanding expertise in the petrochemical industry and wide range of networks with research laboratories, SCGC believes that such a solution will grow the near future. For instance, SCGC is currently collaborating with Norner, a research laboratory, as well as other machine makers and brand owners worldwide for these initiatives. With mono-material packaging in sight, SCGC is confident that it can create a more circular economy for everyone in the coming years.

With sustainability at the core of our business, SCGC is passionately committed to improving people's lives and protecting the world for future generations.



Design for Sustainability

2 ZERO HUNGER



9 INDUSTRY, INNOVATION AND INFRASTRUCTURE



12 RESPONSIBLE CONSUMPTION AND PRODUCTION



13 CLIMATE ACTION






SCGC GREEN POLYMER™ for Carbonated Soft Drink and Sparkling Water Caps & Closures



SX002J and SX002JA for Sustainable Food & Beverage Packaging




**Up to 28%
less plastic use**




Up to 26% GHG reduction




Superior stress cracking resistance

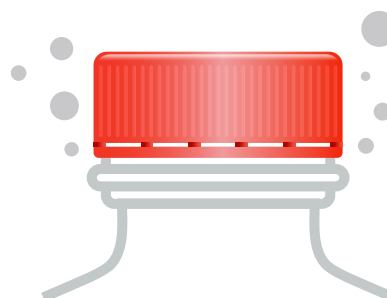

Better gas retention (10%)

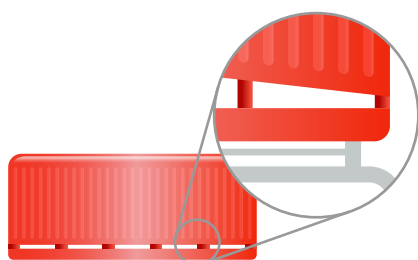

Higher bridge strength (15%)



Less doming (12%)

Reference resin: SCGC Bi-modal HDPE for Carbonated Soft Drink and Sparkling Water Caps & Closures



SCGC GREEN POLYMER™ for Carbonated Soft Drink and Sparkling Water Caps & Closures



GRADE	SX002J	SX002JA
Recommended applications	<ul style="list-style-type: none"> - Carbonated soft drinks and sparkling water for lightweight closures - Hot fill and aseptic beverage closure 	
Recommended processes	<ul style="list-style-type: none"> - Injection molding - Continuous compression molding 	
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ISO 1133	0.55	
Density (g/cm³) ISO 1183-2	0.955	
Tensile modulus (MPa) ISO 527 (1B, Speed 1 mm/min)	1,000	
Charpy impact strength (kJ/m²) ISO 179 @ 23°C	8	
Environmental stress cracking resistance (ESCR), F50, 10% Igepal (hr) ASTM D1693	>1,000	
Slip agents	✓	-
Key characteristics	<ul style="list-style-type: none"> - Superior Environmental Stress Cracking Resistance (ESCR) - Excellent balance of stiffness and toughness - Good organoleptic property 	
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011 	



SCGC™ HDPE: EXCELLENT STRESS CRACKING RESISTANCE for Carbonated Soft Drink and Sparkling Water Caps & Closures

GRADE	S007J	S007JA
Recommended applications	<ul style="list-style-type: none"> - Carbonated soft drinks and sparkling water - Hot fill and aseptic beverage closure 	
Recommended processes	<ul style="list-style-type: none"> - Injection molding - Continuous compression molding 	
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ISO 1133	0.8	
Density (g/cm³) ISO 1183-2	0.955	
Tensile modulus (MPa) ISO 527 (1B, Speed 1 mm/min)	1,100	
Charpy impact strength (kJ/m²) ISO 179 @ 23°C	7	
Environmental stress cracking resistance (ESCR), F50, 10% Igepal (hr) ASTM D1693	>600	
Slip agents	✓	-
Key characteristics	<ul style="list-style-type: none"> - Excellent stress cracking resistance - Excellent balance of stiffness and toughness - Good organoleptic property 	
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011 	



SCGC™ HDPE: ORGANOLEPTIC for Still & Mineral Water and Hot-Filled Beverage Caps & Closures

GRADE	H355JA	H455JA
Recommended applications	<ul style="list-style-type: none"> - Still & mineral water closures - Hot-filled beverage closures - Aseptic beverage closures 	
Recommended processes	<ul style="list-style-type: none"> - Injection molding - Continuous compression molding 	
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ASTM D1238	7.5	4.5
Density (g/cm³) ASTM D1505	0.961	0.958
Flexural modulus (kg/cm²) ASTM D790	13,500	12,500
Notched Izod Impact at 23°C (J/m) ASTM D256	33	39
Environmental stress cracking resistance (ESCR), F50, 10% Igepal (hr) ASTM D1693	6	7
Slip agents	-	-
Key characteristics	<ul style="list-style-type: none"> - Excellent processability - High stiffness - Excellent organoleptic property 	<ul style="list-style-type: none"> - Good processability - High stiffness - Excellent organoleptic property
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011 	



SCGC™ PP: BLOCK COPOLYMER for Carbonated Soft Drink and Hot-Filled Beverage Caps & Closures

GRADE	P443J
Recommended applications	<ul style="list-style-type: none"> - Carbonated soft drink closures - Hot-filled beverage closures
Recommended processes	<ul style="list-style-type: none"> - Injection molding - Continuous compression molding
Melt flow rate (MFR) at 230°C, 2.16kg (g/10min) ASTM D1238	6
Flexural modulus (kg/cm²) ASTM D790	15,000
Notched Izod Impact at 23°C (J/m) ASTM D256	110
Tensile strength at yield (kg/cm²) ASTM D638	290
HDT (°C) ASTM D648	120
Slip agents	✓
Key characteristics	<ul style="list-style-type: none"> - Excellent processability - High stiffness - High heat resistance
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011



SCGC™ PP: HOMOPOLYMER for Thin Wall Injection Molding Food Packaging

GRADE	P904J	P905J
Recommended applications	<ul style="list-style-type: none"> - Drinking cups - Food containers - Household products 	
Melt flow rate (MFR) at 230°C, 2.16kg (g/10min) ASTM D1238	75	65
Flexural modulus (kg/cm²) ASTM D790	16,500	17,000
Notched Izod Impact at 23°C (J/m) ASTM D256	38	32
HDT at 4.6 kg/cm² (°C) ASTM D648	121	100
Haze 1 mm (%) ASTM D1003	43	20
Key characteristics	<ul style="list-style-type: none"> - High flowability - High clarity - Good stiffness and toughness balance - Microwavable or hot fillable 	
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011 	



SCGC™ PP: HOMOPOLYMER for Thermoformed Food Packaging

GRADE	P304S	P303S
Recommended applications	<ul style="list-style-type: none"> - Dairy cups - Disposable drinking cups - Food containers 	
Melt flow rate (MFR) at 230°C, 2.16kg (g/10min) ASTM D1238	2.1	2.3
Flexural modulus (kg/cm ²) ASTM D790	13,500	19,000
Notched Izod Impact at 23°C (J/m) ASTM D256	60	59
HDT at 4.6 kg/cm² (°C) ASTM D648	110	128
Key characteristics	<ul style="list-style-type: none"> - Good stiffness and toughness - Good clarity - Microwavable or hot fillable 	<ul style="list-style-type: none"> - High stiffness - High clarity - Microwavable or hot fillable
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011 	



SCGC™ PP: HETEROPHASIC POLYPROPYLENE for Thermoformed Frozen to Microwavable Food Packaging

GRADE	P348S
Recommended applications	Food containers
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ASTM D1238	2.8
Density (g/cm³) ASTM D1505	0.963
Flexural modulus (kg/cm²) ASTM D790	20,500
Notched Izod Impact at 23°C (J/m) ASTM D256	34
HDT at 4.6 kg/cm² (°C) ASTM D648	130
Key characteristics	<ul style="list-style-type: none"> - Excellent thermal stability and high stiffness - High impact strength at low temperature - Microwavable or hot fillable
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Commission Regulation (EU) no. 10/2011



SCGC™ LDPE for Extrusion Coating/ Lamination

GRADE	D477C	D777C	D388C
Recommended applications		<ul style="list-style-type: none"> - Sachet - Pouch - Aseptic box - Woven - Paper & tarpaulin 	
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ASTM D1238	4	7	8
Density (g/cm³) ASTM D1505	0.924	0.920	0.919
Melting temperature (°C) ASTM D2117	112	107	107
Key characteristics	<ul style="list-style-type: none"> - Good neck-in performance - High stiffness - High scratch resistance - Good processability, thickness control, and edge stability 		<ul style="list-style-type: none"> - Excellent draw ability - Suitable for high speed machine - Good processability and thickness control with low coating weight
International compliance standards	<ul style="list-style-type: none"> - U.S FDA 21 CFR 177.1520 - Regulation (EU) No.10/2011 - Regulation (EC) 2023/2006 (GMP) - Packaging and Packaging waste Directive 94/62/EC - RoHS: Directive 2011/65/EU - China's Hygienic Standards; GB9685 – 2016, GB4806 – 2016 - JHOSPA - Consult the regulations for complete details 		

Remark: Coating properties obtained from pilot coating line, Melt temperature 295°C, line speed 100 m/min



SCGC™ HDPE for Co-Extrude Blown Film/ Machine Direction Oriented Film

GRADE	H619F
Recommended applications	<ul style="list-style-type: none"> - General/Industrial packaging - Diaper back sheet - Stand up pouch - Laminated film and tube - Pressure sensitive adhesive label - Mono-material packaging
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ASTM D1238	0.7
Density (g/cm³) ASTM D1505	0.962
Tensile strength at break (MPa) ASTM D882	MD 42, TD 35
Elongation at break (%) ASTM D882	MD 730, TD 4
2% secant modulus (MPa) ASTM D882	MD 915, TD 1010
Elmendorf tear strength (g) ASTM D1922	MD 8, TD 261
Key characteristics	<ul style="list-style-type: none"> - High film stiffness - High temperature resistance - Excellent compatibility with LLDPE, LDPE
International compliance standards	<ul style="list-style-type: none"> - U.S FDA 21 CFR 177.1520 - Regulation (EU) No.10/2011 - Regulation (EC) 2023/2006 (GMP) - Packaging and Packaging waste Directive 94/62/EC - RoHS: Directive 2011/65/EU - JHOSPA - China's Hygienic Standards; GB9685 – 2016, GB4806.6 – 2016 - Consult the regulations for complete details



SCGC™ HDPE

for Cast Film/ Extrusion Coating/ Lamination

GRADE	H377C
Recommended applications	<ul style="list-style-type: none"> - Non-breathable film - Breathable film - Laminated film - Laminated tube - Aseptic carton - Released liner - Paper coating
Melt flow rate (MFR) at 190°C, 2.16kg (g/10min) ASTM D1238	7.5
Density (g/cm³) ASTM D1505	0.961
Tensile strength at break (MPa) ASTM D882	MD 37, TD 28
Elongation at break (%) ASTM D882	MD 859, TD 3
2% secant modulus (MPa) ASTM D882	MD 706, TD 855
Elmendorf tear strength (g) ASTM D1922	MD 8, TD 64
Key characteristics	<ul style="list-style-type: none"> - Excellent stiffness - Easy tearing in MD - Excellent temperature resistance and scratch resistance
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Regulation (EU) No.10/2011 - Regulation (EC) 2023/2006 (GMP) - Packaging and Packaging waste Directive 94/62/EC - RoHS: Directive 2011/65/EU - JHOSPA - China's Hygienic Standards; GB9685 – 2016, GB4806.6 – 2016 - Consult the regulations for complete details

Remark: Film properties obtained from pilot line at SCGC, 25 micron, Melt temperature 220°C



SCGC™ PP: HOMOPOLYMER & COPOLYMER for Cast Film/ Bi-axial Oriented Film

GRADE	P607F	P350F	P405F
Recommended process	Cast film	Cast film	Bi-axial Oriented Film
Recommended applications	<ul style="list-style-type: none"> - Snack pouch - Laminated film - Metalized film 	<ul style="list-style-type: none"> - Retort packaging 	<ul style="list-style-type: none"> - Laminated film - Metalized film - Snack & Confectionary pouch - Sachet
Melt flow rate (MFR) at 230°C, 2.16kg (g/10min) ASTM D1238	7.0	3.2	3.0
Density (g/cm ³) ASTM D1505	0.910	0.900	0.900
Tensile strength at break (MPa) ASTM D882	MD 36, TD 9	MD 39, TD 25	35
Elongation at break (%) ASTM D882	MD 470, TD 20	MD 804, TD 656	95
Flexural modulus (MPa) ASTM D790A	1608	800	1500
Notched Izod impact strength at 23 °C (J/M) ASTM D256A	-	-	47
Haze (%) ASTM D1003	9 (Film thickness 25 µm)	11 (Film thickness 70 µm)	1.1 (Film thickness 20 µm)
Key characteristics	<ul style="list-style-type: none"> - High film stiffness - Good clarity - Good processability 	<ul style="list-style-type: none"> - Excellent seal properties - Excellent clarity - Good stress-whitening resistance 	<ul style="list-style-type: none"> - Good stretchability - High clarity - Good dimensional stability
International compliance standards	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Regulation (EU) No.10/2011 - Regulation (EC) No.1907/2006 (REACH) - Packaging and Packaging waste Directive 94/62/EC - RoHS: Directive 2011/65/EU - China's Hygienic Standards; GB9685 – 2016, GB4806.6 – 2016 - Consult the regulations for complete details 	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Regulation (EU) No.10/2011 - Regulation (EC) No. 1907/2006 (REACH) - Directive 2011/65/EU (RoHS) - Consult the regulations for complete details 	<ul style="list-style-type: none"> - U.S. FDA 21 CFR 177.1520 - Regulation (EU) No. 10/2011 - RoHS: Directive 2011/65/EU - Consult the regulations for complete details



SCG Chemicals PLC.

1 Siam Cement Road, Bangsue, Bangkok 10800, Thailand

Email: foodbev_pkg@scg.com

www.scgchemicals.com



Scan to Email Us



**Scan to Visit
Our Website**



Disclaimer:

- The applications specified for reference only.
- It is customer's responsibilities to inspect and test the product for suitability of the customer's own use and purpose.
- The customer is responsible for appropriate, safe, legal use, processing and handling of the product. To the best of our knowledge, the information contained herein is accurate and reliable as of the date of publication. We however do not assume any liability whatsoever for the accuracy and completeness of the information contained herein.
- We make no warranties which extend beyond the description herein. Nothing herein shall constitute any implied warranty of merchantability or fitness for a particular purpose.
- No liability can be accepted in respect for the use of the product in conjunction with other materials. The information contained herein relates exclusively to the product when it is not used in conjunction with any third party's materials.